

The Galway Y Motor

- Totally Enclosed 1/2 HP, 9000 RPM Motor
- Epoxy coated Steel Motor Housing
- Extra Heavy Duty varnish on all windings
- Interchangeable on all Galway Pumps
- Easy to repair – Replaceable parts include:

- Switch
- Rectifier
- Motor Brushes
- Motor Bearings
- Field
- Armature



GALWAY  USA MADE

Galway 400 Series Pumps

- NO BALL BEARINGS TO REPLACE – EVER!
- 1 YEAR WARRANTY!
- Heavy 1 1/2" Sch. 80 pump tube (.200" wall)
- ECTFE, FEP and Hastelloy® C wetted parts
- Easy to disassemble threaded connections
- Heavy Duty Free Hand weld
- Standard on each pump:
 - Hastelloy® C shaft
 - Suction Strainer (No height added!)
 - Cam Coupler discharge connections

**THE WORLD'S ONLY
SEAL-LESS
BEARING-LESS
TRANSFER PUMPS!**

The pumping solution
for the solution
you're pumping...

**1-800-800-PUMP (7867)
www.galwaypumps.com**

Hastelloy is a registered trademark of Haynes International


Features Totally Enclosed, low maintenance.
12 foot grounded industrial cord.
Sealed bearings.
Sealed switch.
External motor components are powder epoxy coated Steel and Aluminum, maximizing durability and corrosion resistance.
Armature windings have extra heavy duty varnish insulation for use in corrosive environments.

Specifications Totally enclosed, externally rectified, 1/2 Horsepower permanent magnet motor, 8,000 RPM free speed 115/220 VAC, 60 Hz, 7 amp, Intermittent Duty

Maintenance All parts including brushes, armature, bearings, rectifier, switch and field are user replaceable.

Performance 1/2 HP and 8,000 RPM provides flow rates up to 25 gpm and a shutoff head of 20 ft. Pumps specific gravities up to 1.8 and viscosities up to 250 centipoise.

Y Drive Pump Curve

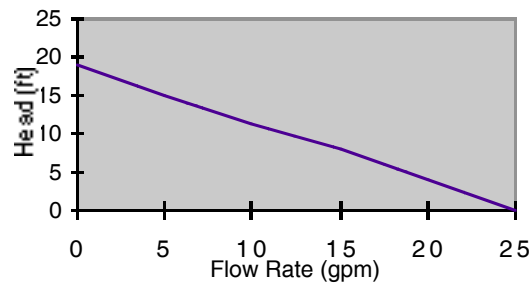

Applications Drum and small tank transfers.
Drum or small tank intermittent mixing
Ideal for aggressive environments.

Options 115 VAC or 220 VAC
Maintained or Momentary Contact Switch
In-line GFCI
Adapts to any Galway 400 Series pump or mixer